Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 222711 (205207-1)

DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST
BD	48

P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
			H1	ADDED -4 PER NPR 4837	06/14/93	SB
			J	OBSOLETE -3 AND REV PER EC 0U1D-0248-00	27 OCT 00	JK

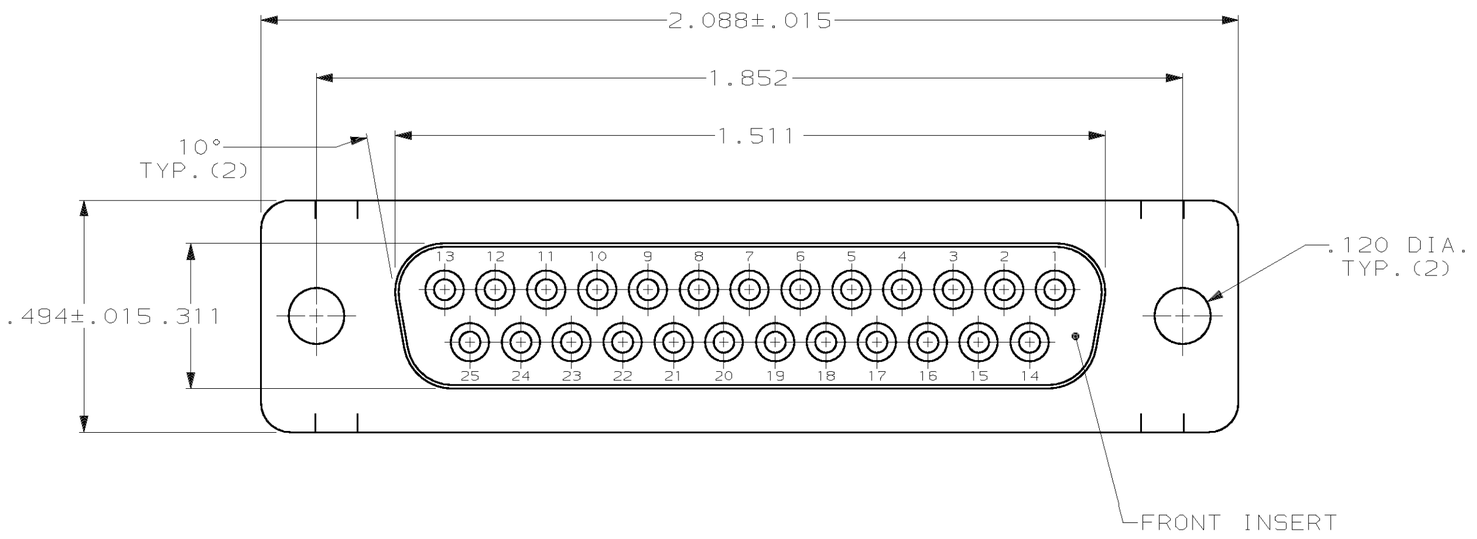

1. CONNECTOR ACCEPTS SIZE 20 DF SOCKET CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
2. CONNECTOR COMPLIES WITH AMP SPEC. 108-40,005 WHERE APPLICABLE.
3. FLAME RETARDANT 94V-0 RATED GLASS FILLED NYLON, COLOR: SEE TABLE.
4. STEEL PER ASTM A109.
5. ZINC PLATED PER ASTM B633; TYPE II; CLASS SC1; YELLOW CHROMATE.

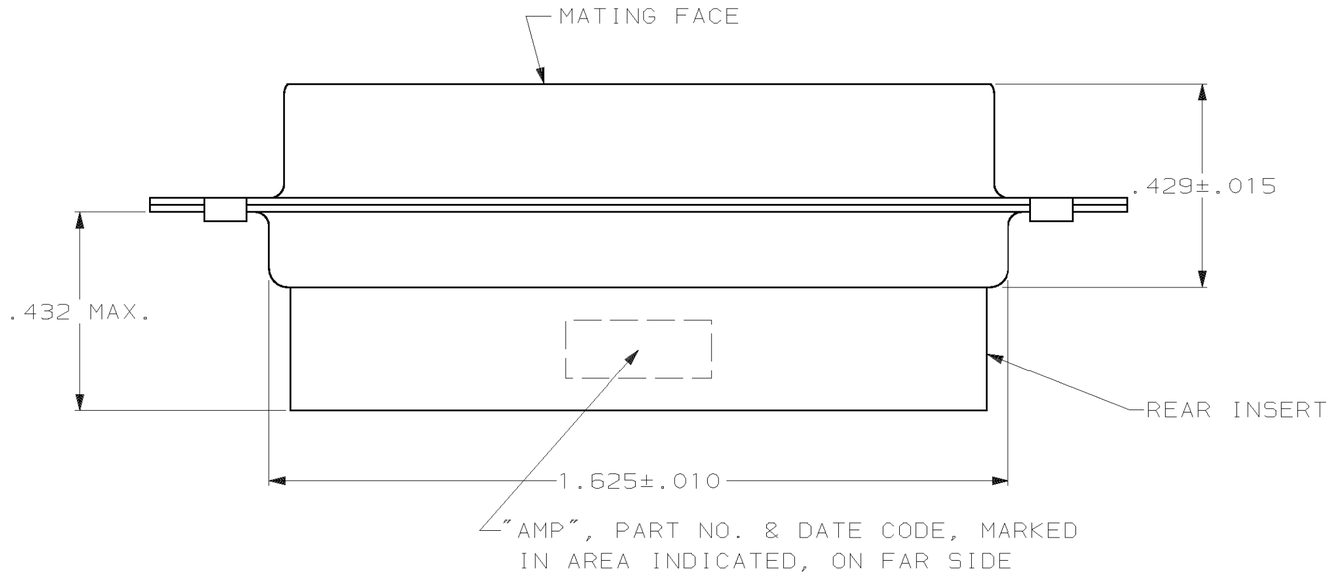

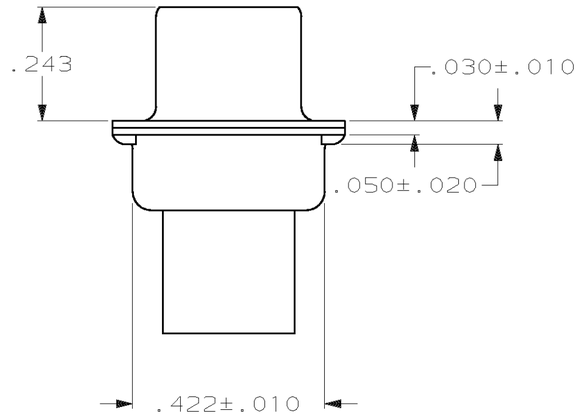

205207

	PACKAGING TYPE	INSERTS COLOR	PART NUMBER
OBSOLETE	SMALL PACK	BLACK	205207-4
	STANDARD	BLUE	205207-3
	STANDARD	BLACK	205207-1

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSION IN INCHES.
TOLERANCES ON :
2 PLC DEC ± -
3 PLC DEC ± .005
ANGLES ± 2°

MATERIAL
INSERTS: 3
SHELLS: 4

FINISH
SHELLS: 5

DR 7-19-85 S.WELDON
CHK 7-19-85 J.GERACE
APPD 7-29-85 L.BREKOSKY
APPD 7-31-85 V.KUMAR
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

AMP Incorporated
Harrisburg, PA 17105-3608

NAME
RECEPTACLE CONNECTOR, SIZE 3, 25 POS., AMPLIMITE™ HDP

SIZE	CAGE CODE	DRAWING NO
C	00779	C-205207

SCALE NTS SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

AMP 1471-6 REV 3-92

CUSTOMER DRAWING

27-OCT-00 08:38:07 amp34993 /home/amp34993/edmmod